


nubacalleleq

Matte finish tiles can give a classic yet subtle look to any space. When applied on the floor, their anti-skid feature comes in handy and gives your space unparalleled excellence.





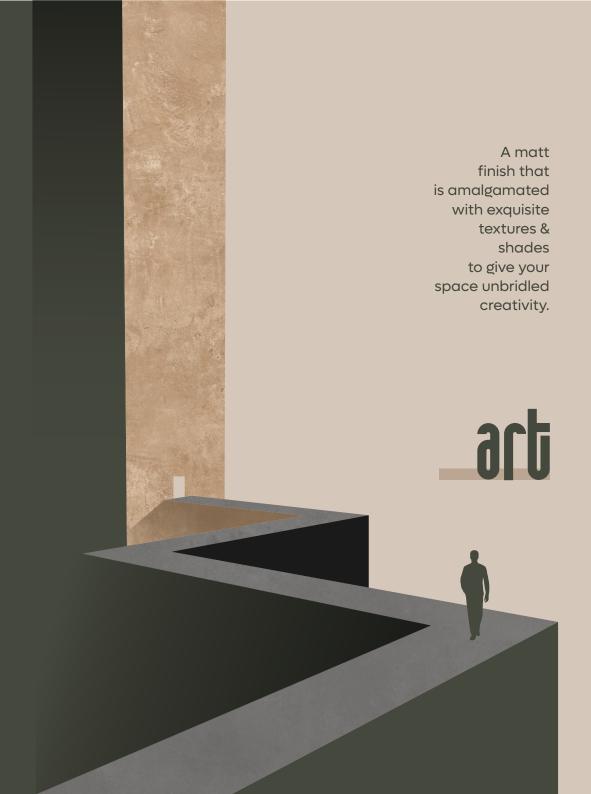





KILN-DLT
PRESS- HLT
POLISING-KEDA
DIGITAL-SYSTEM



unmatched







FEATURES & APPLICATIONS







IC RESISTANT TO ICE AND FROST

FIRE & HIGH-TEMPERATURE RESISTANT



SCRATCH & IMPACT RESISTANT



CHEMICAL & STAIN RESISTANCE



UNALTERABLE TO UV RAYS



 \bigcirc \bigcirc

EASY TO



100% NATURAL & RECYCLABLE





HOME INDOOR



EXTERNAL CLADDING



SHOP & BOUTIQUE




OFFICE BUILDING



HOSPITALITY



COMMERCIAL SPACE

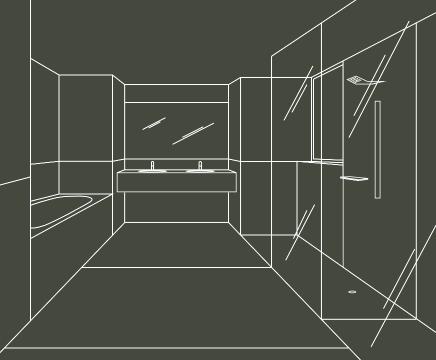





CUBIX BROWN




CUBIX BEIGE

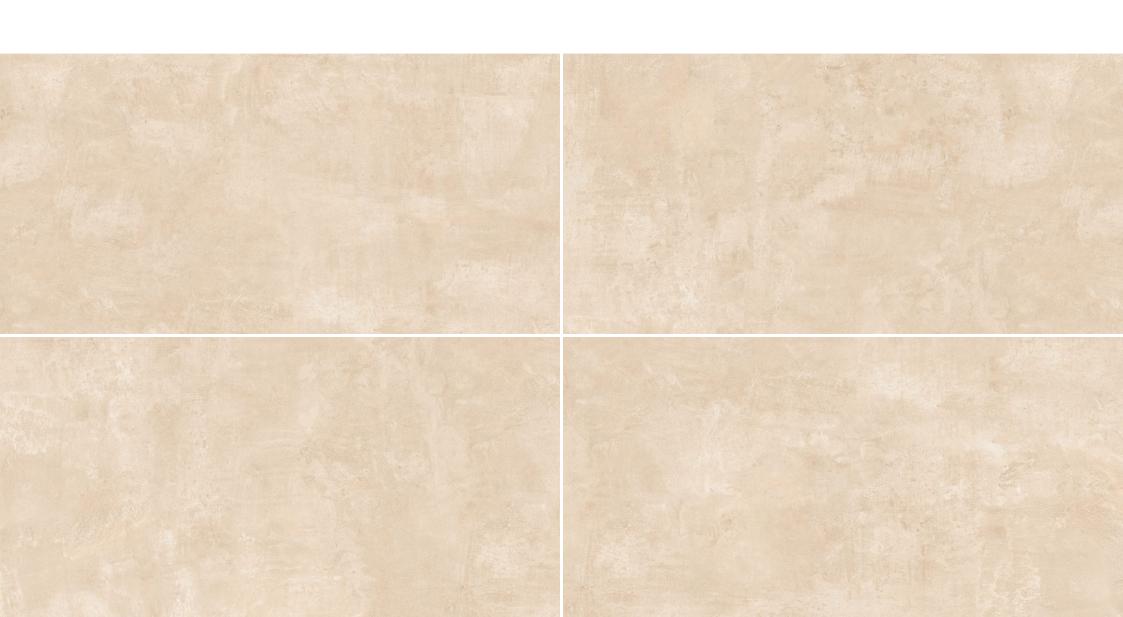


CUBIX GREY

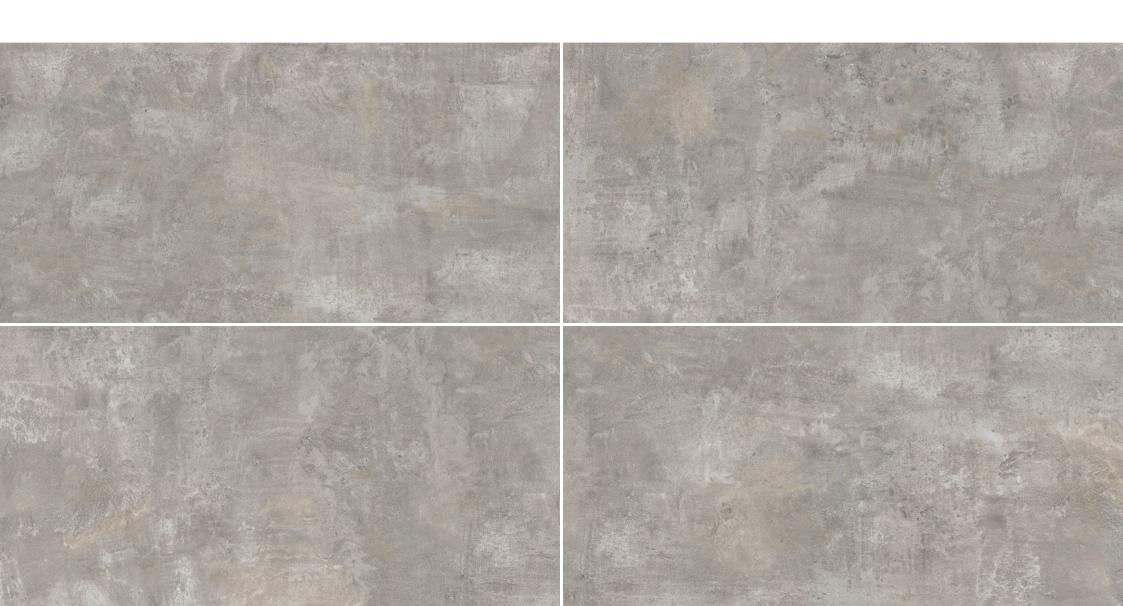


CUBIX BIANCO

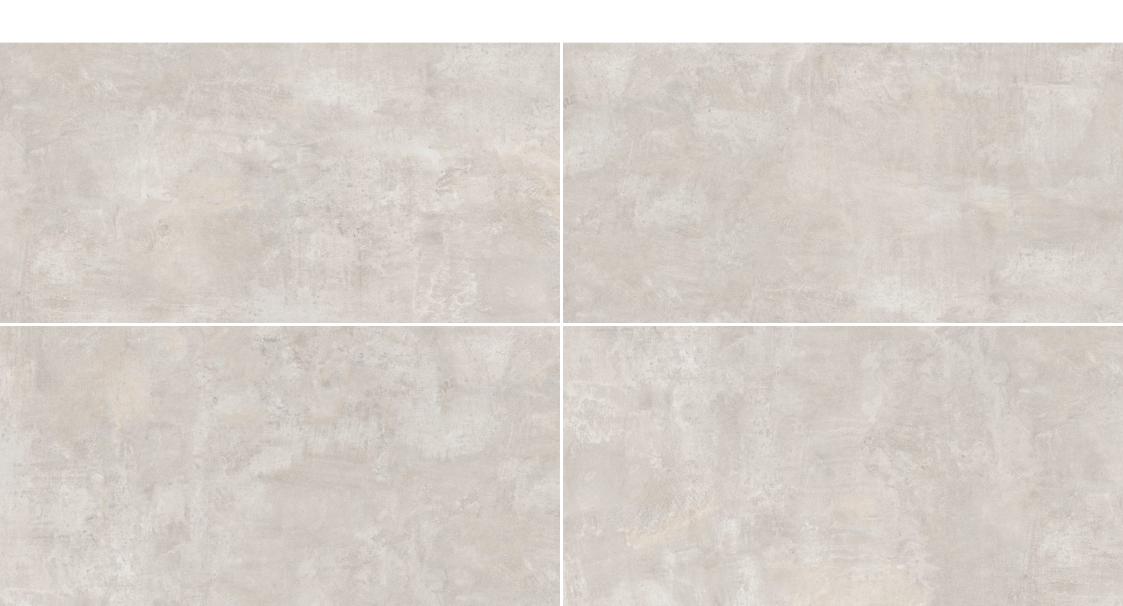


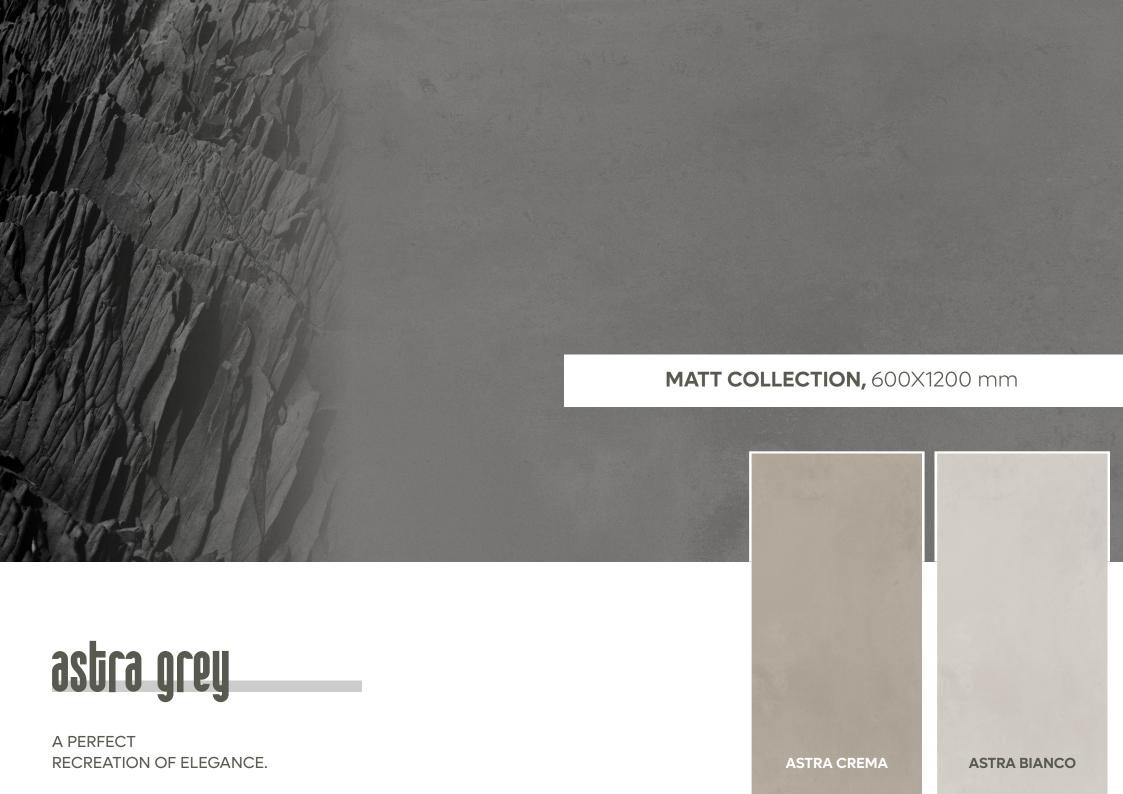

ASTRA GREY

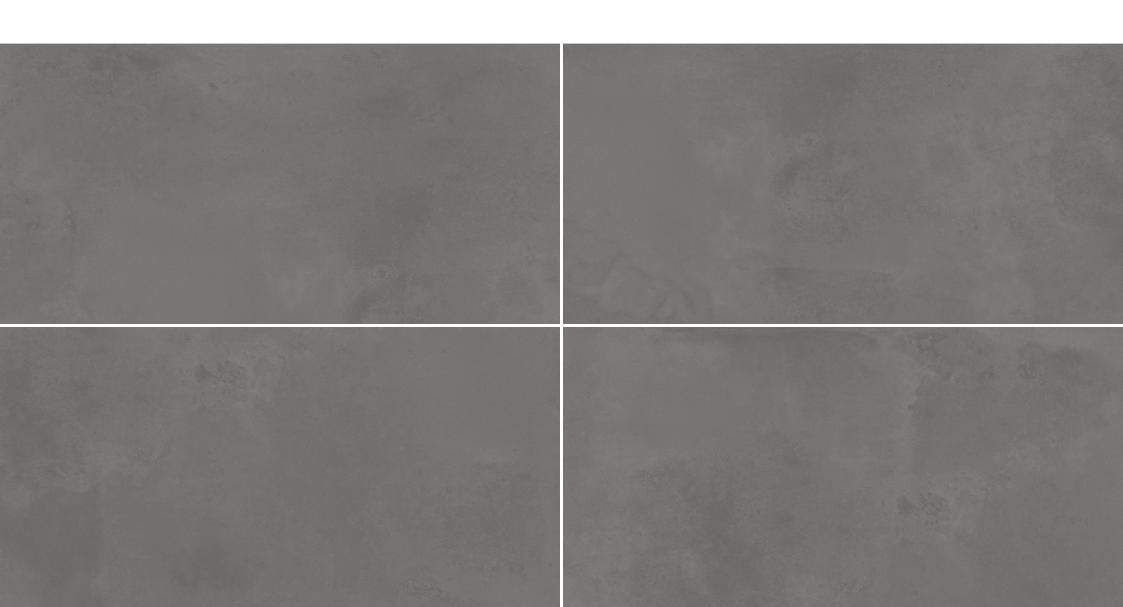


ASTRA CREMA

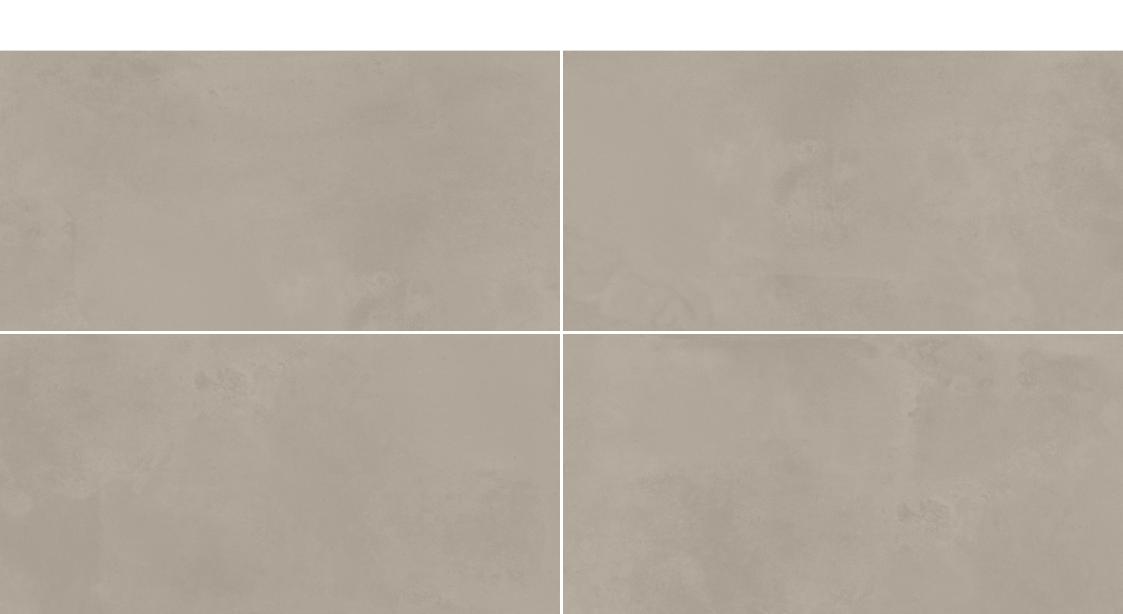


ASTRA BIANCO




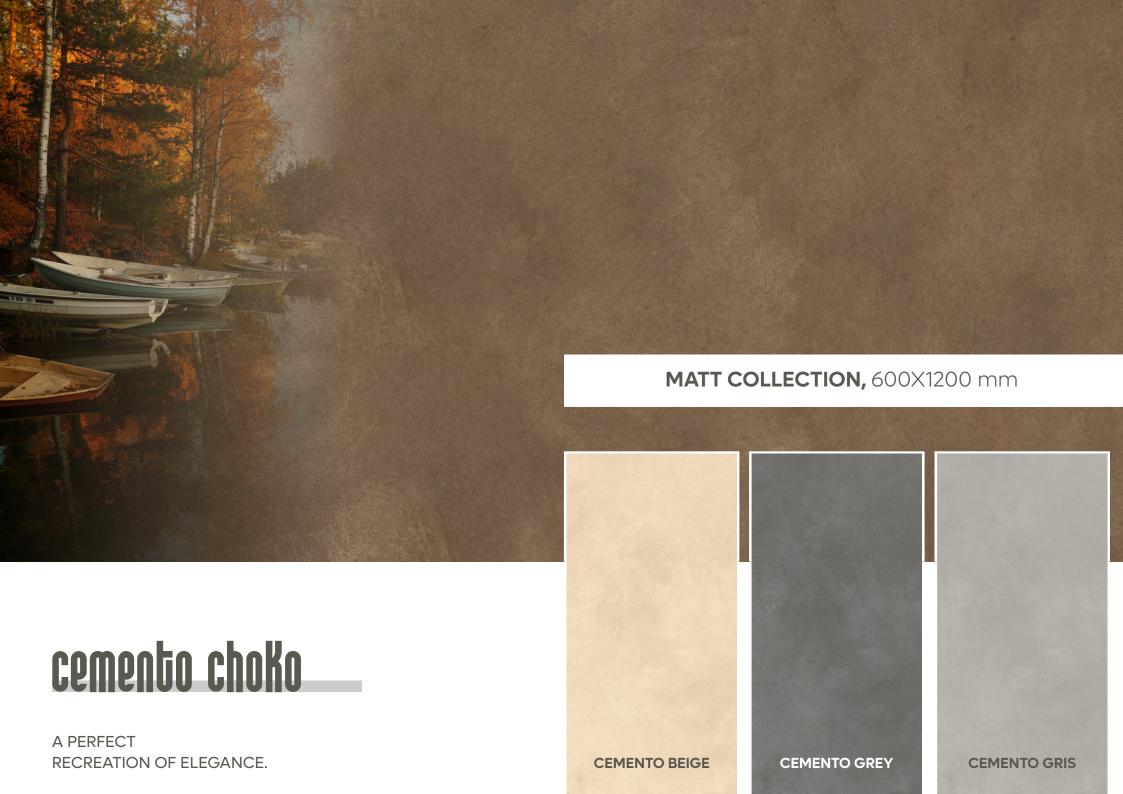


CEMENTO CHOKO

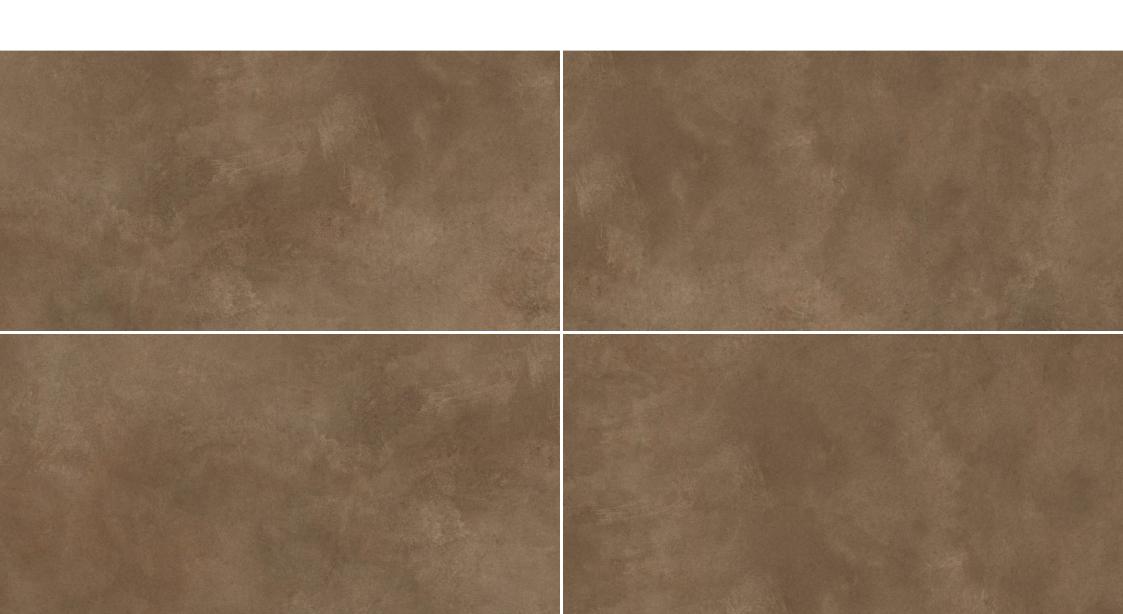


CEMENTO BEIGE

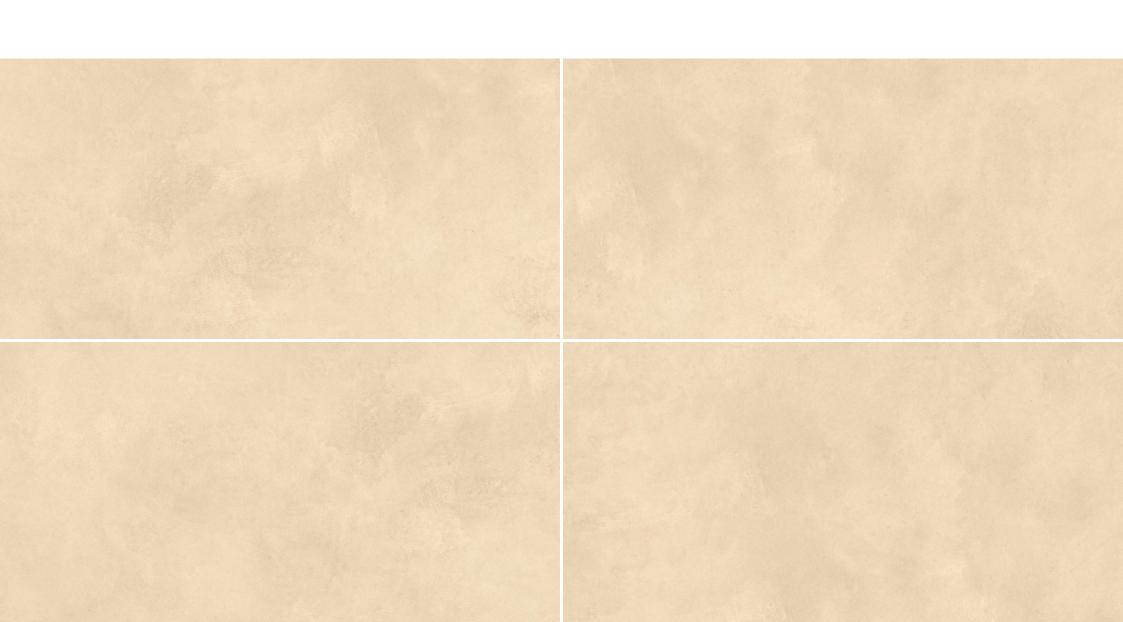

CEMENTO GREY

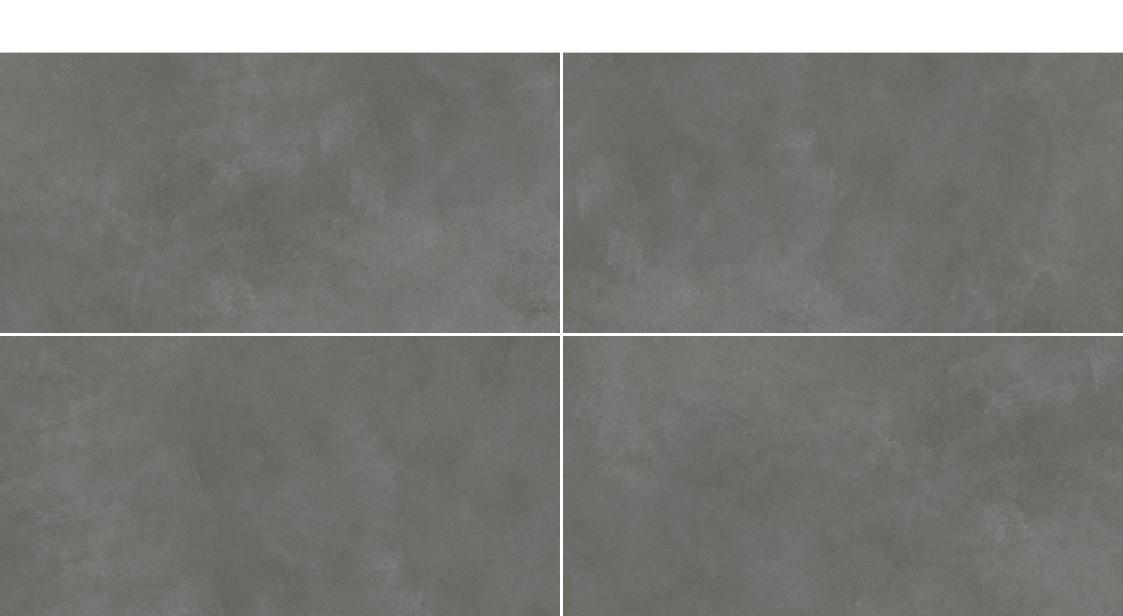

CEMENTO GRIS

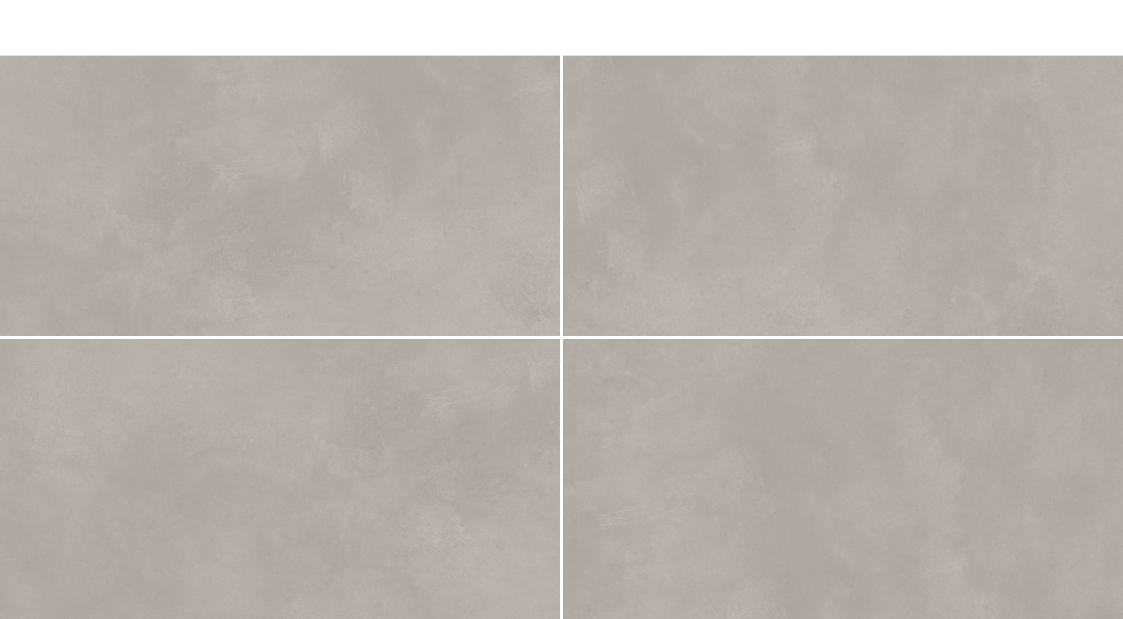




clara mood promu

A PERFECT RECREATION OF ELEGANCE.



CLARA WOOD BROWN

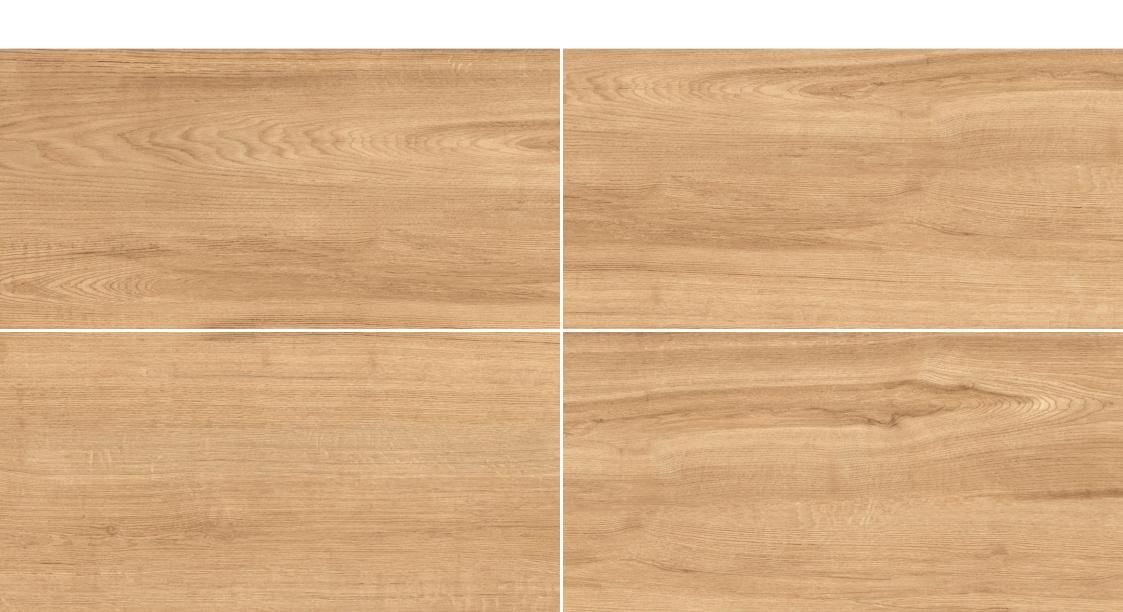

CLARA WOOD BEIGE






corns ctews


A PERFECT RECREATION OF ELEGANCE.

CORUS CREAMA

CORUS CREMA

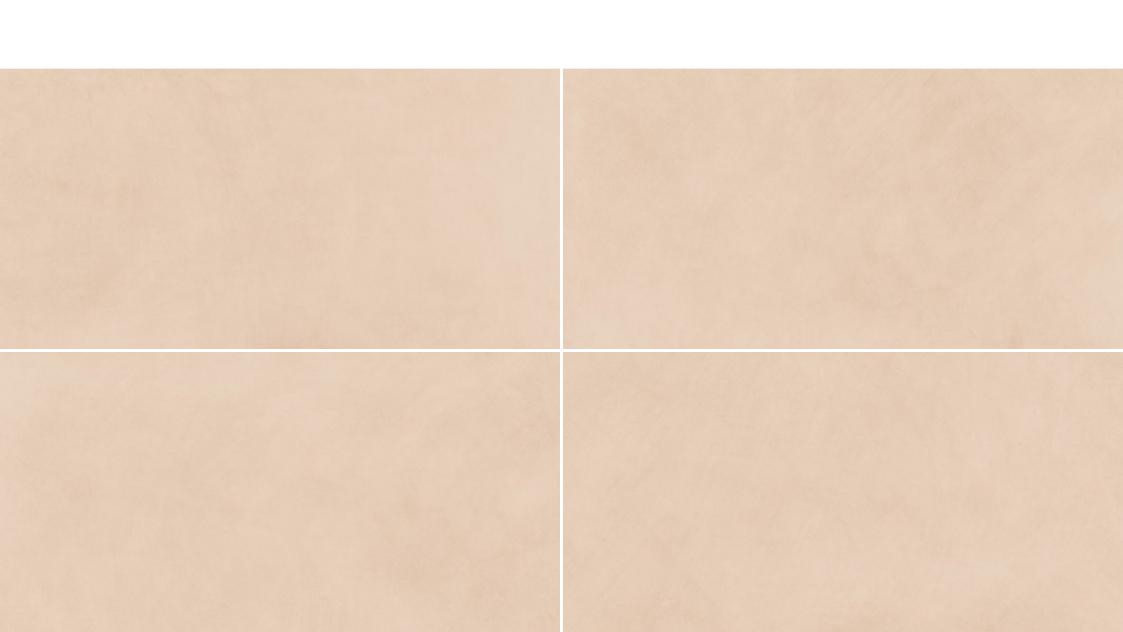


CORUS BIANCO

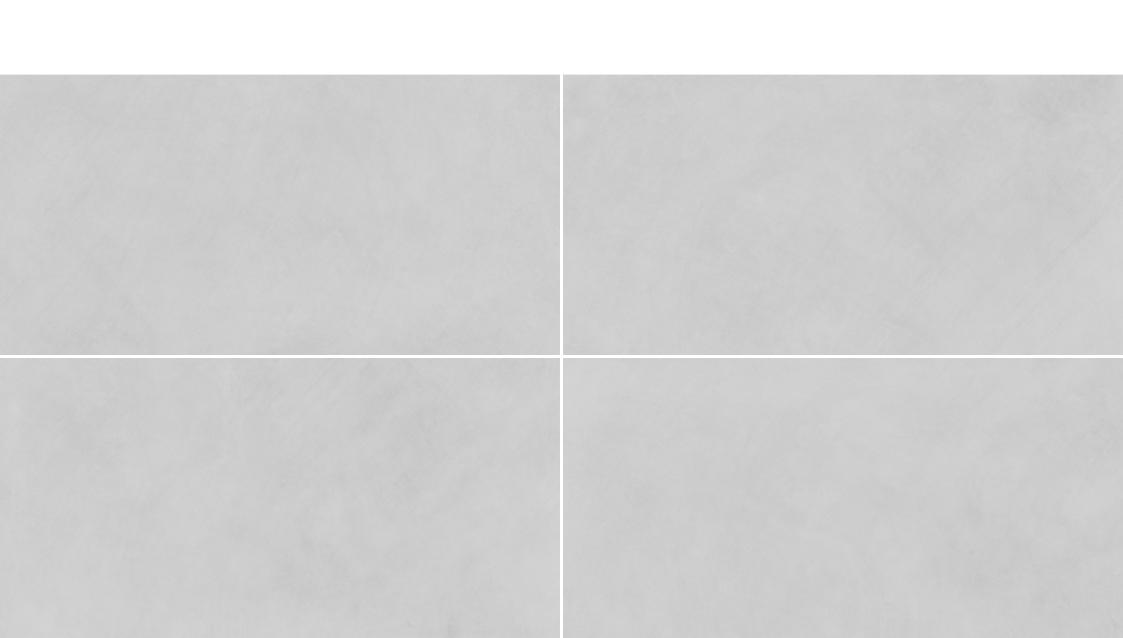





FLORNCE CREMA

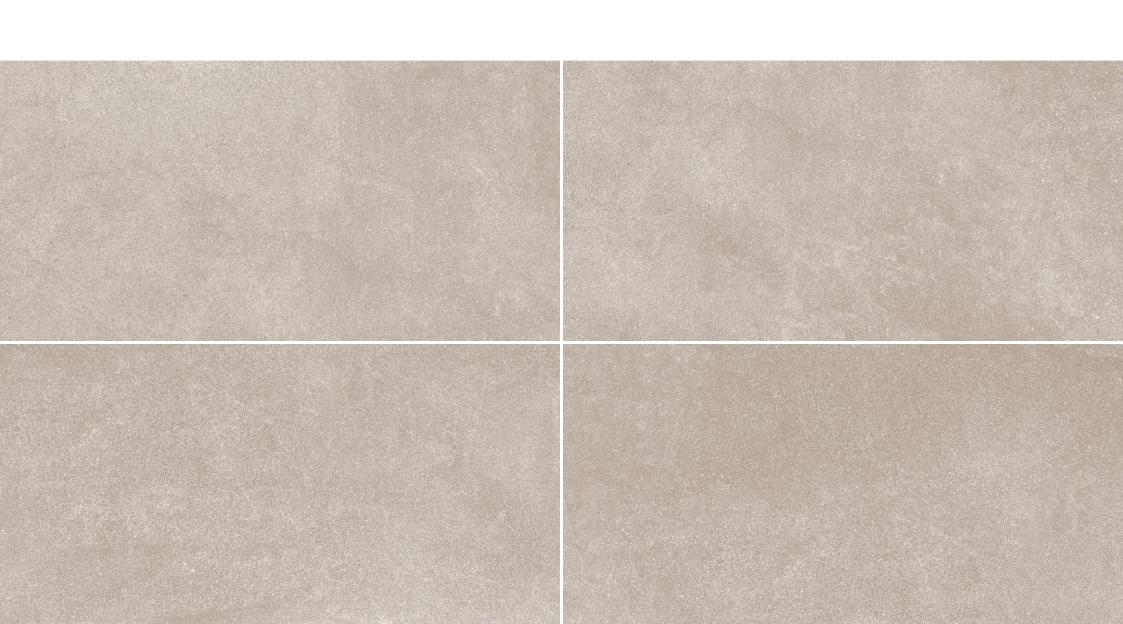

FLORNCE BIANCO

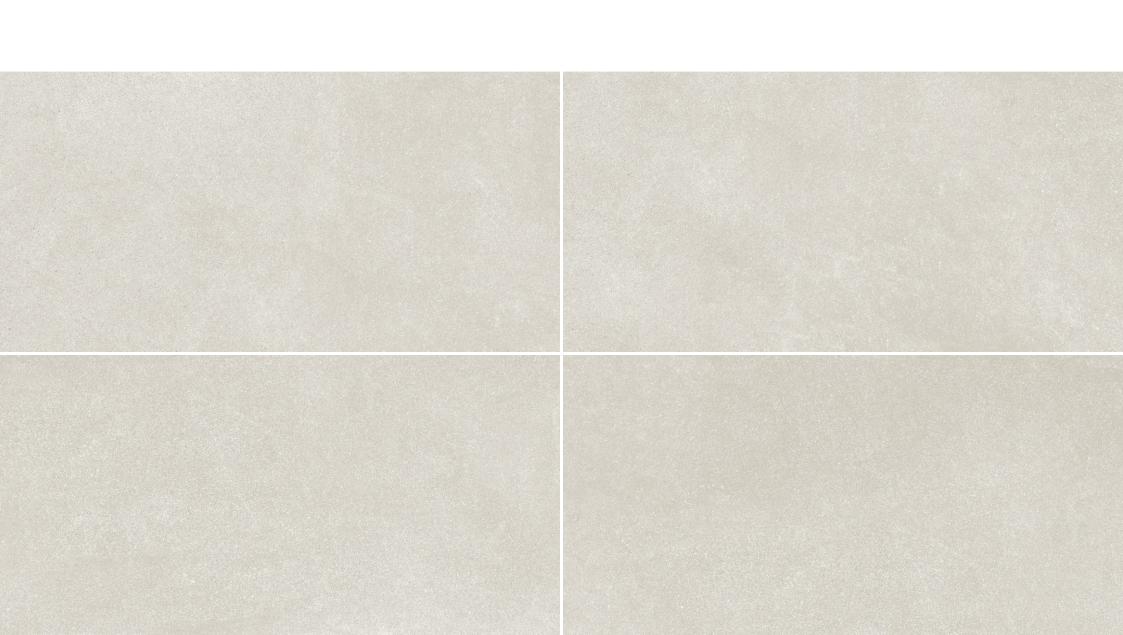

FLORNCE GREY

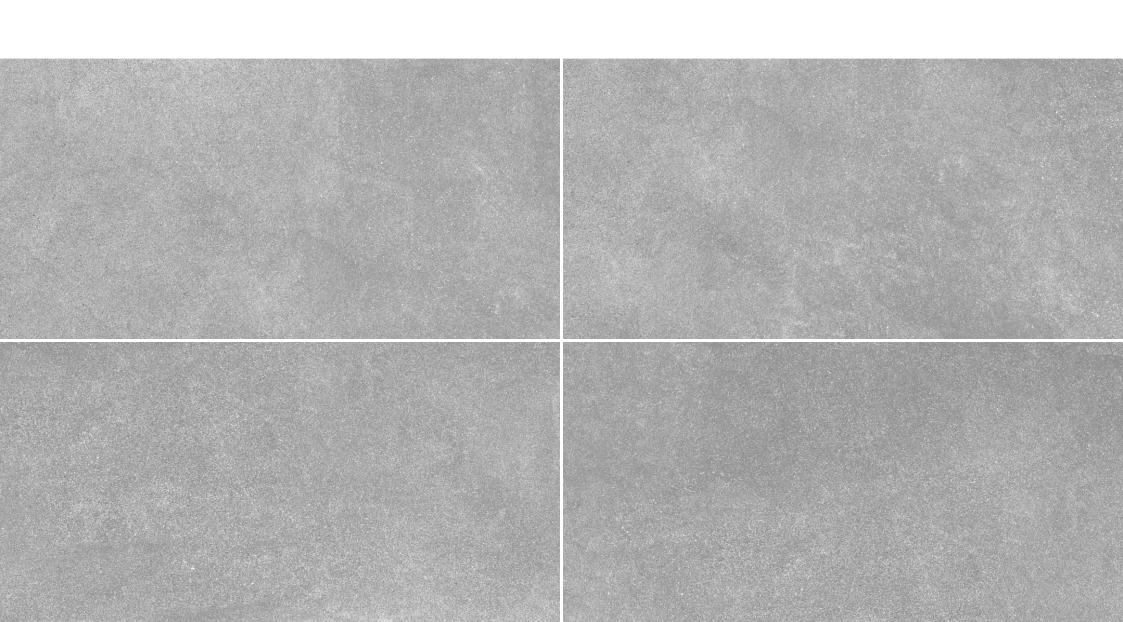





MARBO CHOKO



MARBO BEIGE

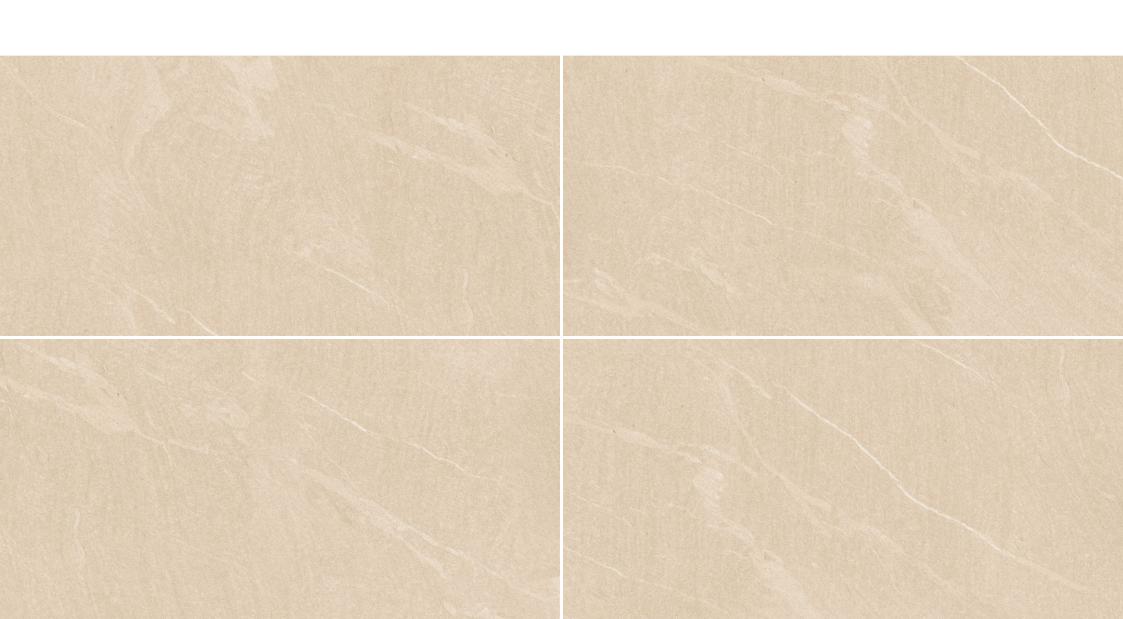


MARBO GRIS

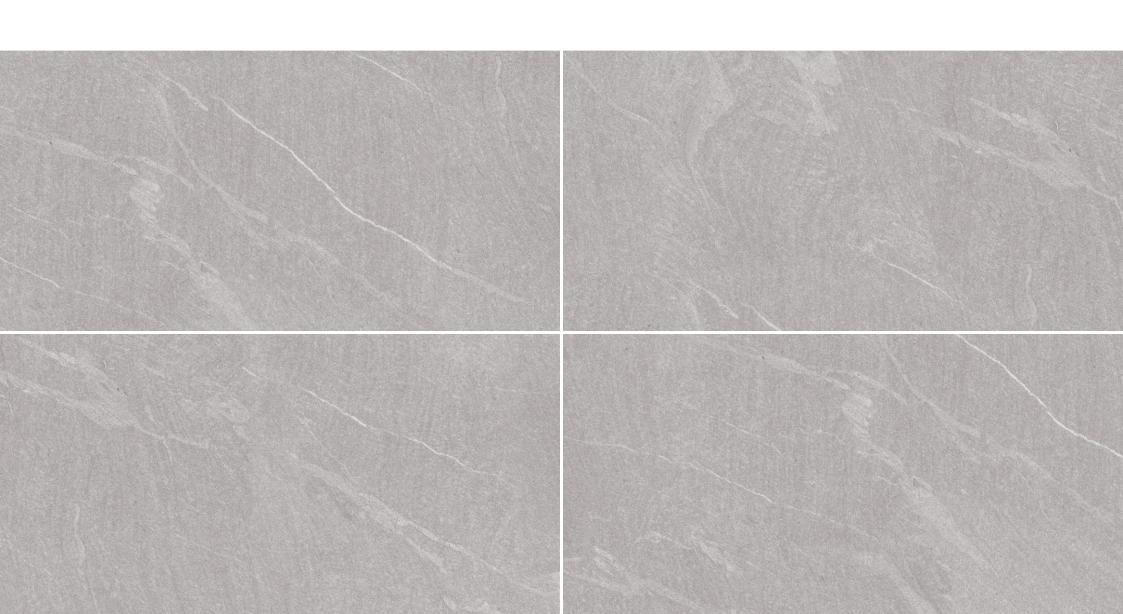


MARBO ROSO




MARBO GREY

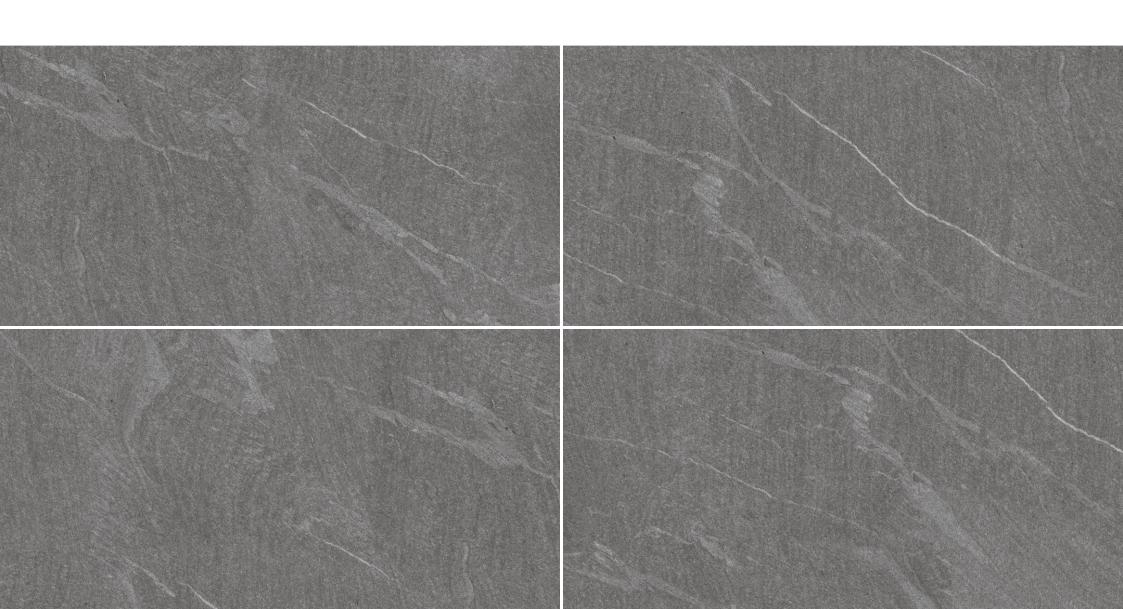


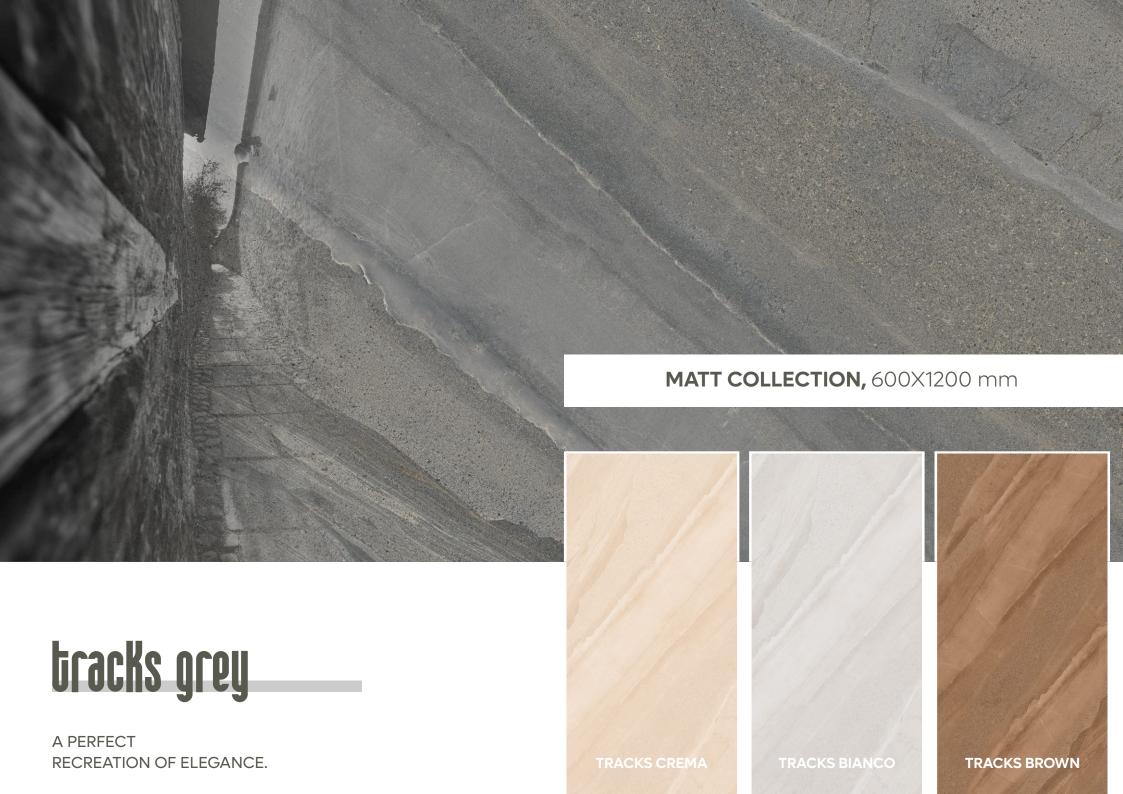


TRACKS GREY

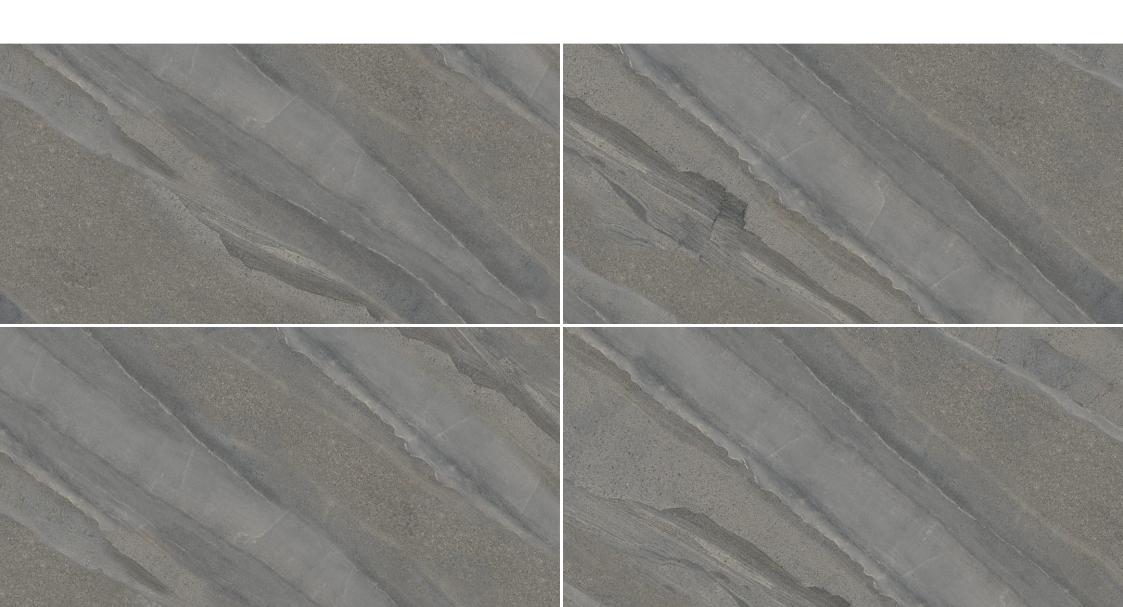


TRACKS CREMA

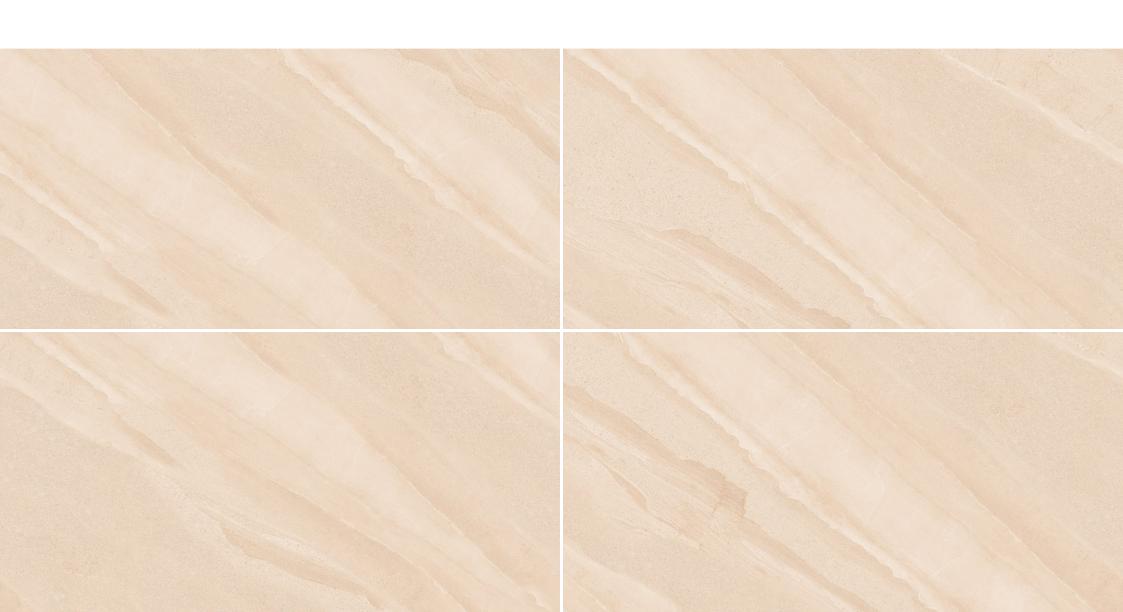

TRACKS BIANCO

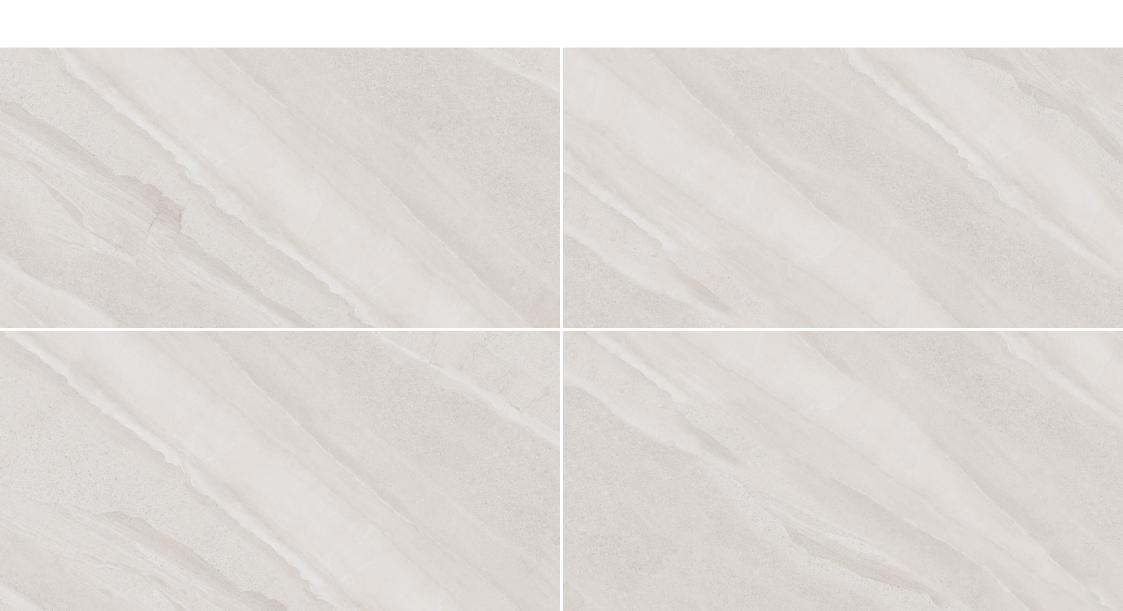

TRACKS BROWN

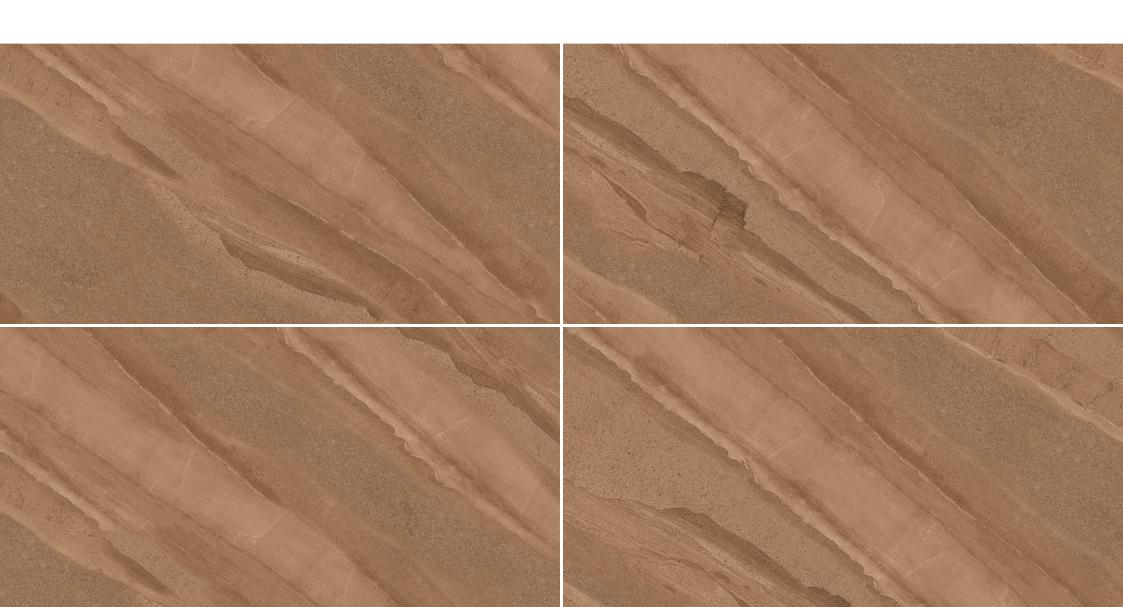

TECHNICAL SPECIFICATION

PACKING DETAILS

SR. NO	PRODUCT	NOMINAL SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600x1200mm	9 mm	2	1.44 Sq. Mtr.

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD			
REGULATORY PROPERTIES							
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2			
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2			
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2			
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2			
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2			
Color difference	Unaltered	No change	No change	ISO-10545-16			
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER			
STRUCTURAL PROPERTIES							
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3			
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082			
MASSIVE MECHANICAL PROF	SIVE MECHANICAL PROPERTIES						
Modulus of rupture	Min. 35 N/mm²	Min. 40 N/mm²	Min. 40 N/mm²	ISO-10545-4			
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4			
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5			
SURFACE MECHANICAL PROI							
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7			
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101			
THERMO HYGROMETRIC PROPERTIES							
Frost resistance	No damage	No damage	No damage	ISO-10545-12			
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9			
Moisture expansion	Nil	Nil	Nil	ISO-10545-10			
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8			
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11			
CHEMICAL PROPERTIES							
Chemical resistance	No damage	No damage	No damage	ISO-10545-13			
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14			
SAFETY PROPERTIES							
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17			
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.			
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15			