



light dark

TILES ARE THEART OF HOME

This collection improves on this natural stone's shapes, colors and subtle nuances, accentuating its dazzling shine, intriguing pattern, and elegant appeal.

The chromatic interplay of its veins and the depth of all its background infuse a strong personality, transforming surfaces into an immediate focus of attraction.



EXPLORE THE UNEXPECTED

Superb designs combined with cutting-edge technical features that together allow for stunning visual impacts and clever plays on the color that will look fabulous in any room where a wall or floor tiles are a core decorative element.



SPACE



ANTIQ LIGHT - DARK



ANTIQ LIGHT ANTIQ DARK Size : 600x1200mm Finish: Glossy Random: 04





ANTRESIT LIGHT - DARK



Size: 600x1200mm Finish: Glossy Random: 04

ANTRESIT LIGHT ANTRESIT DARK





AQUARIS LIGHT - DARK




AQUARIS LIGHT AQUARIS DARK

Size : 600x1200mm

Finish: Glossy

Random: 04



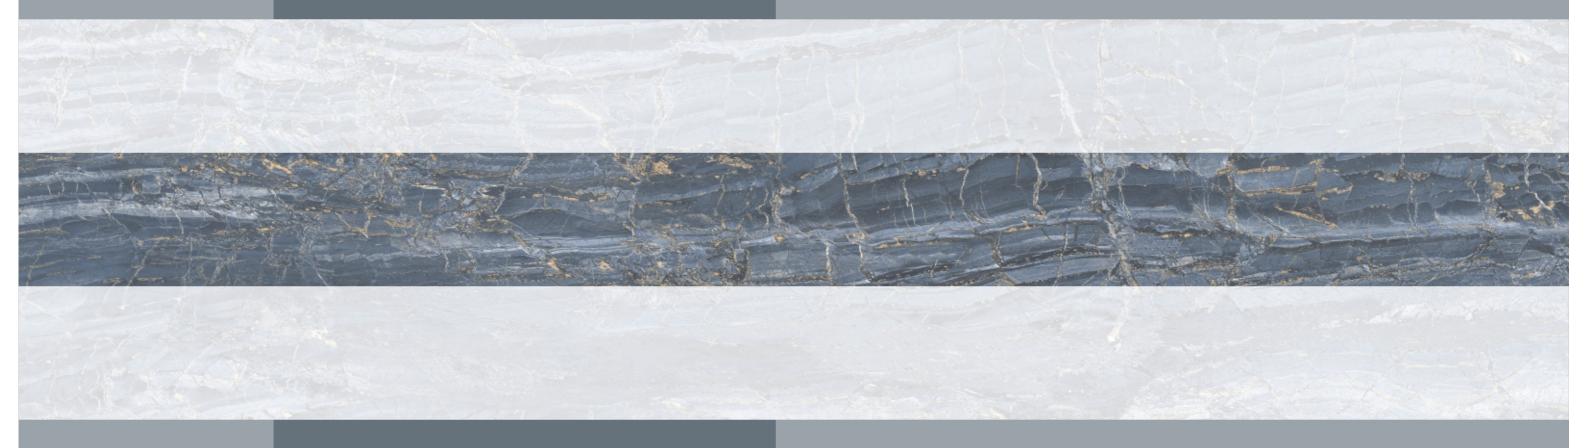

ARISTOC LIGHT - DARK



ARISTOC BLUE LIGHT ARISTOC BLUE DARK


Size : 600x1200mm


Finish: Glossy

Random: 04



BAZEL LIGHT - DARK

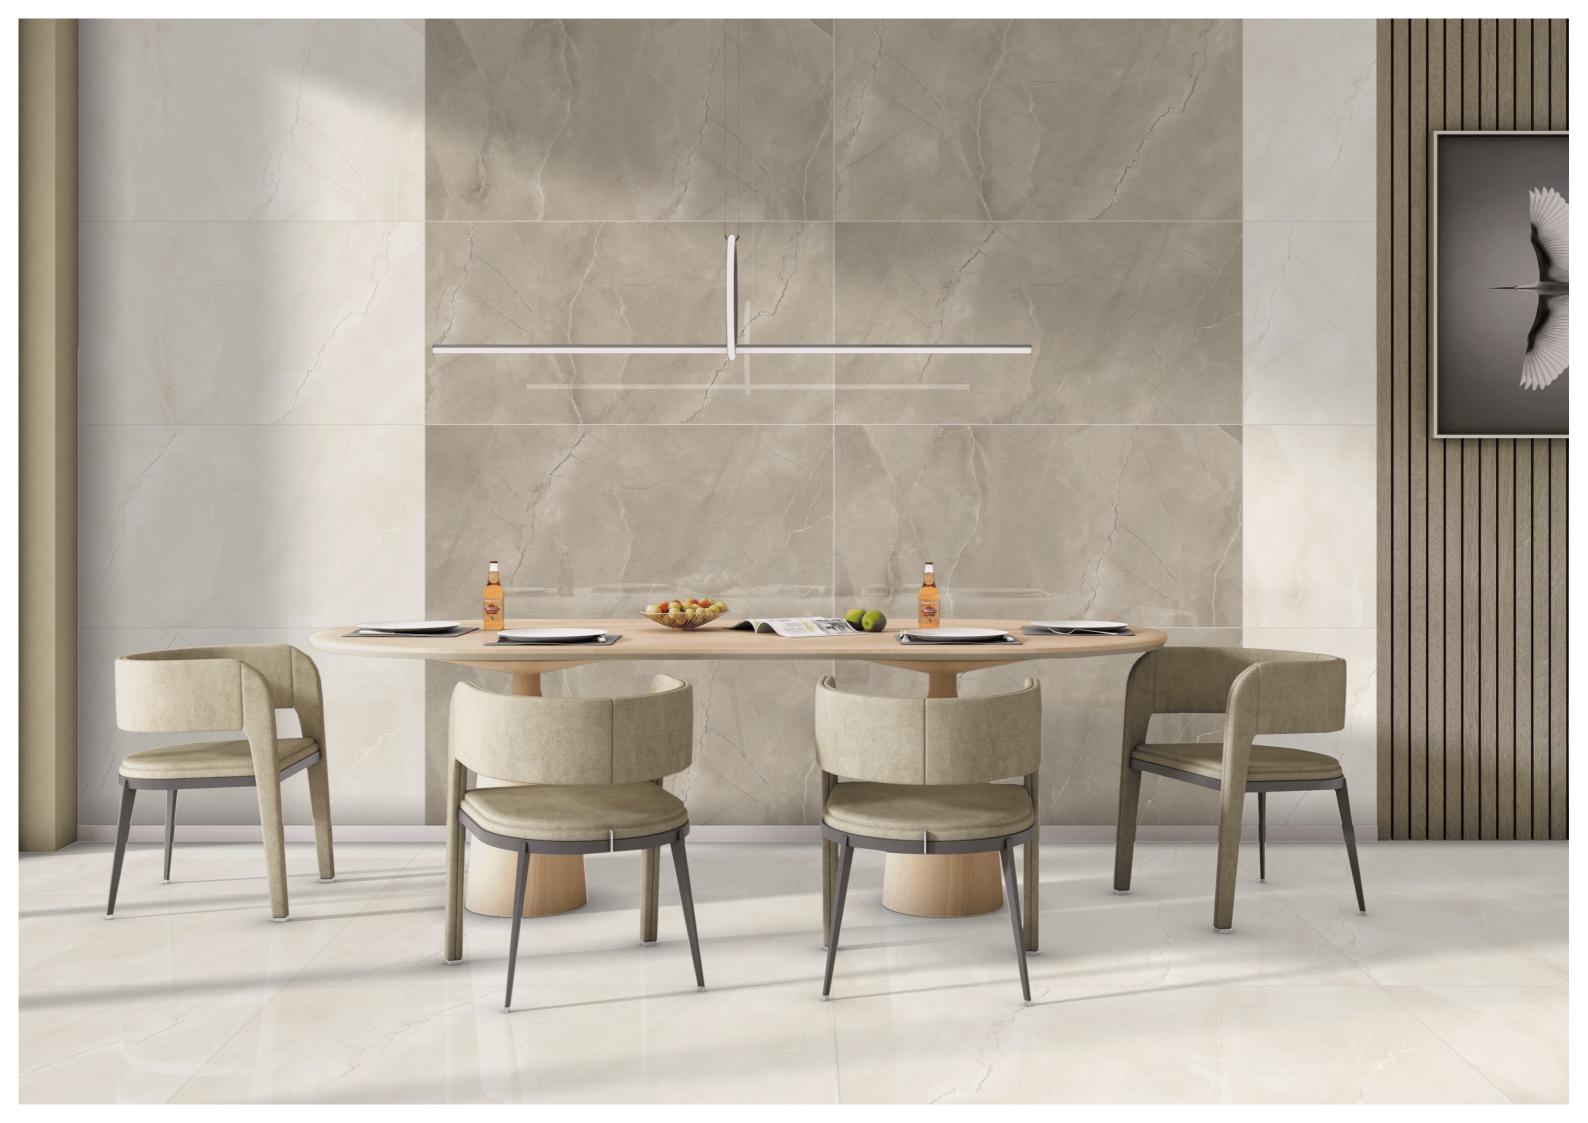

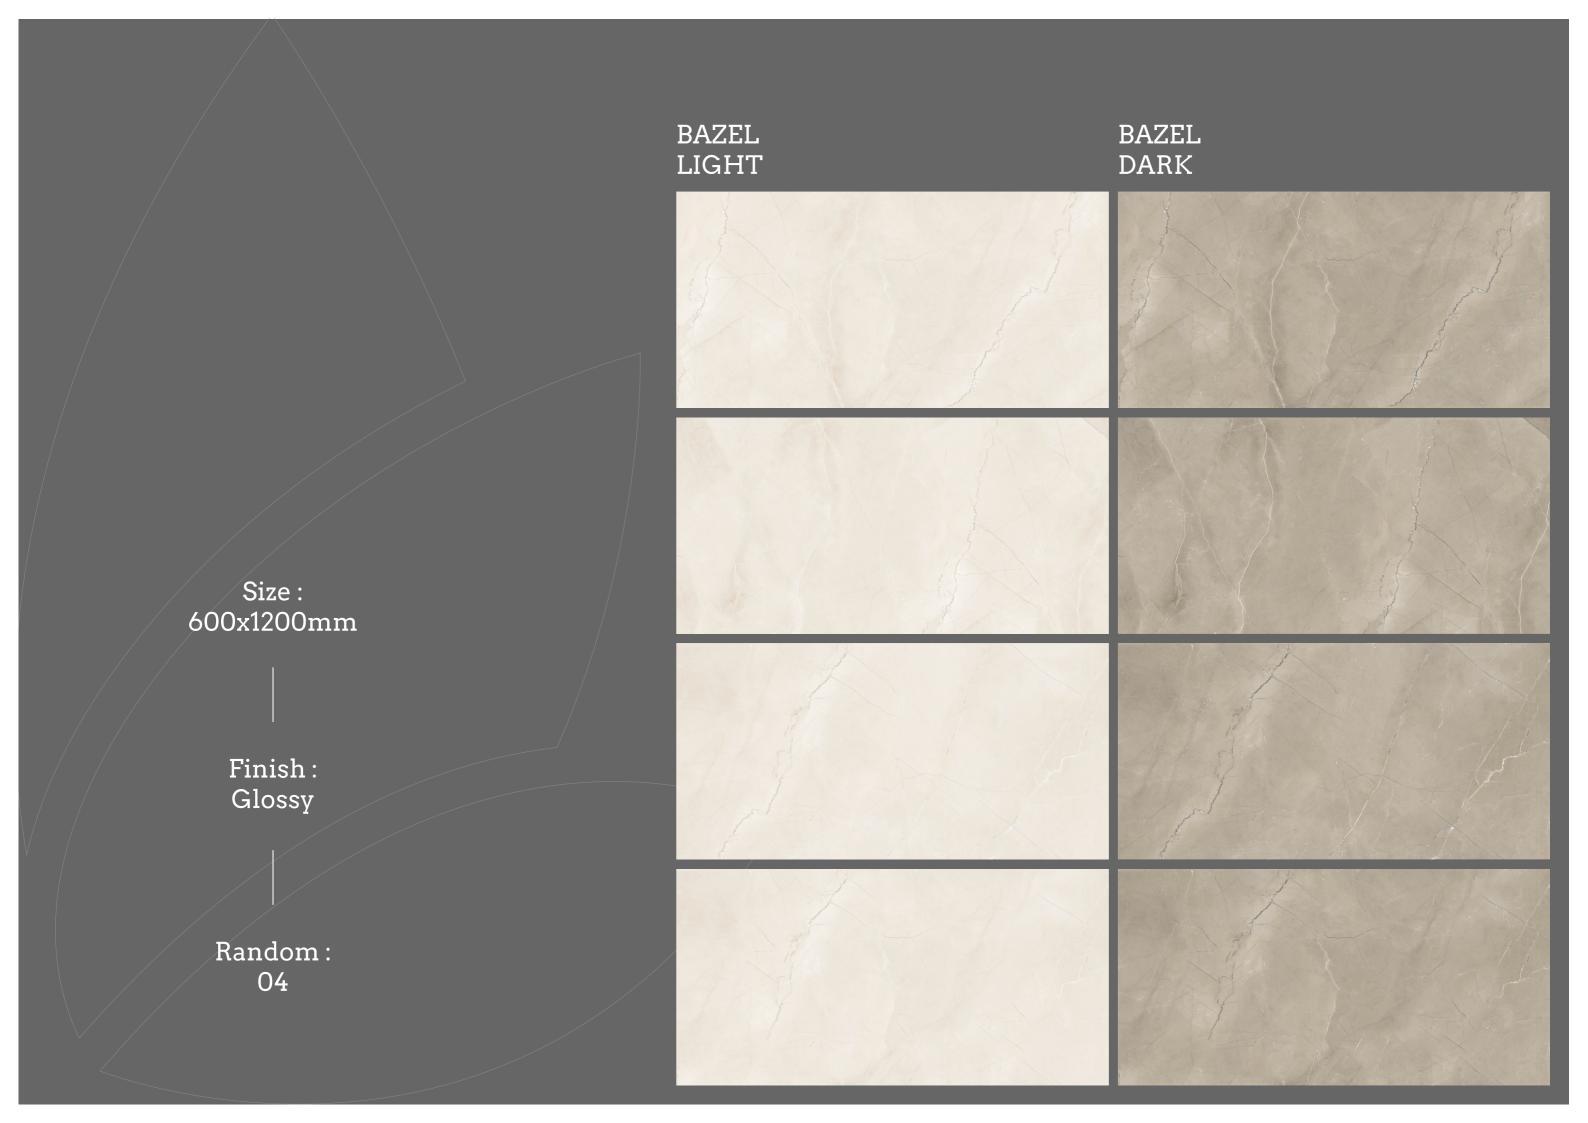





DOVER LIGHT - DARK




DOVER LIGHT DOVER DARK Size: 600x1200mm Finish: Glossy Random: 04





ELCTEC LIGHT - DARK




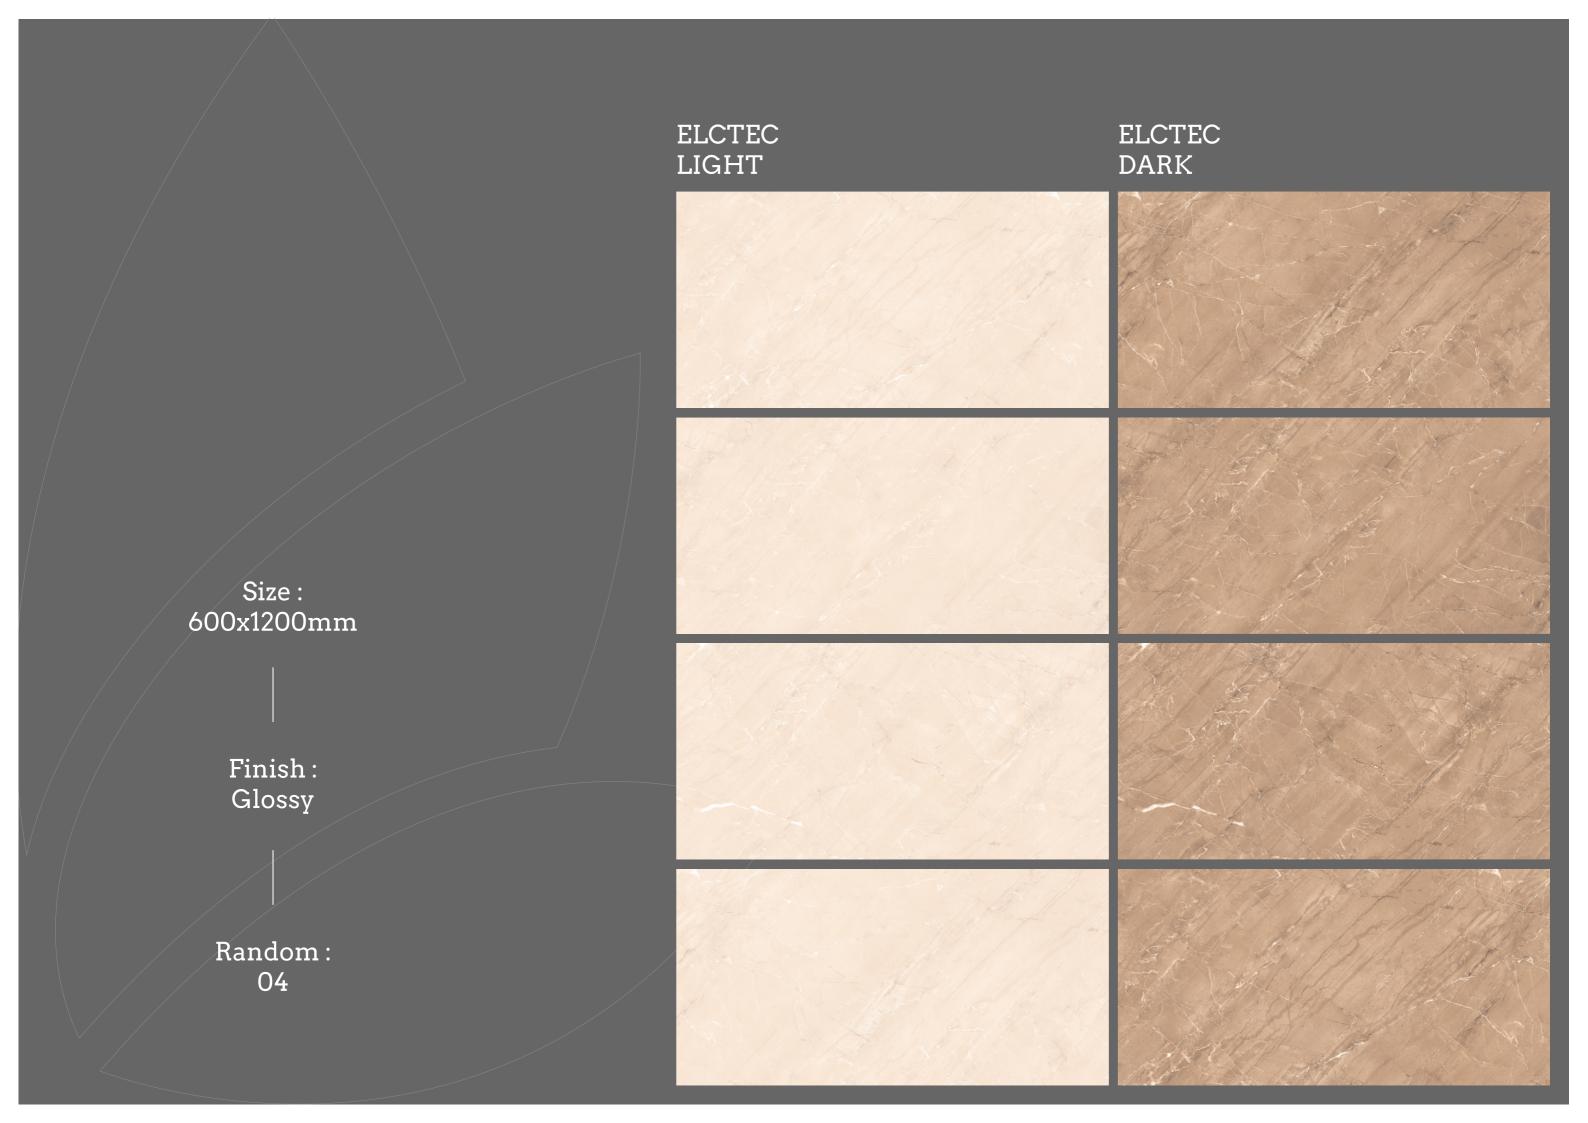



ELECTRA LIGHT - DARK




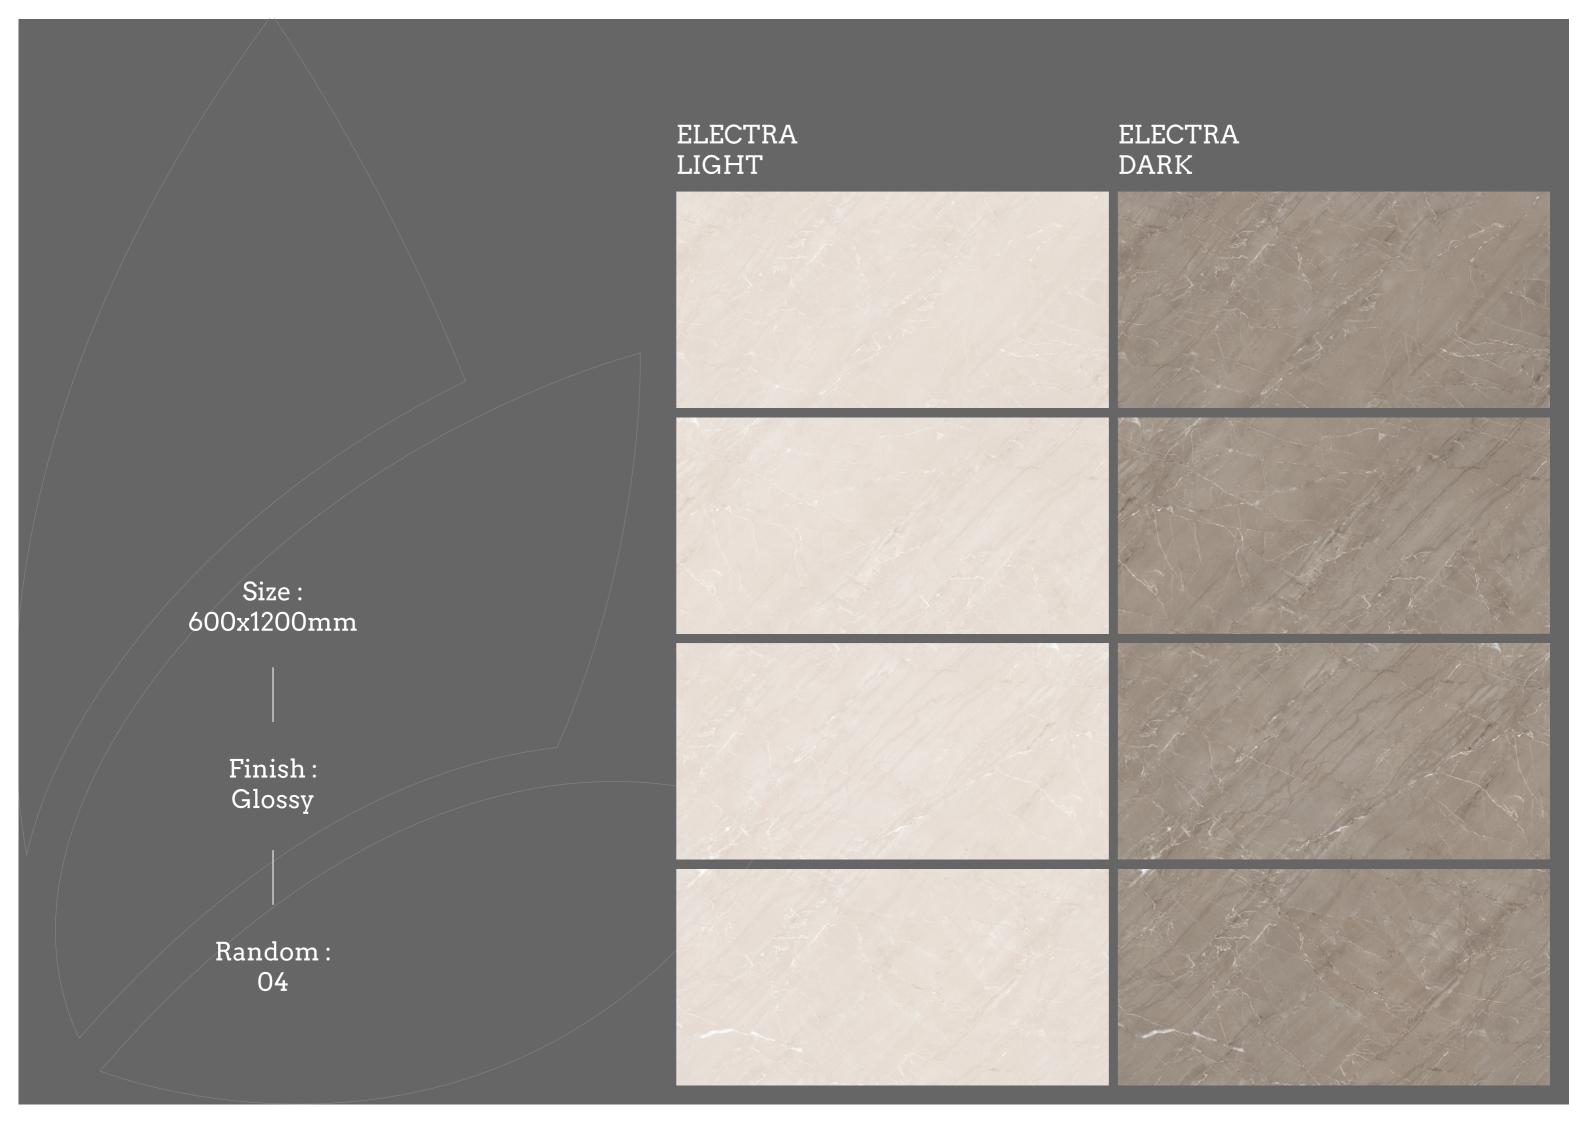



IRON LIGHT - DARK



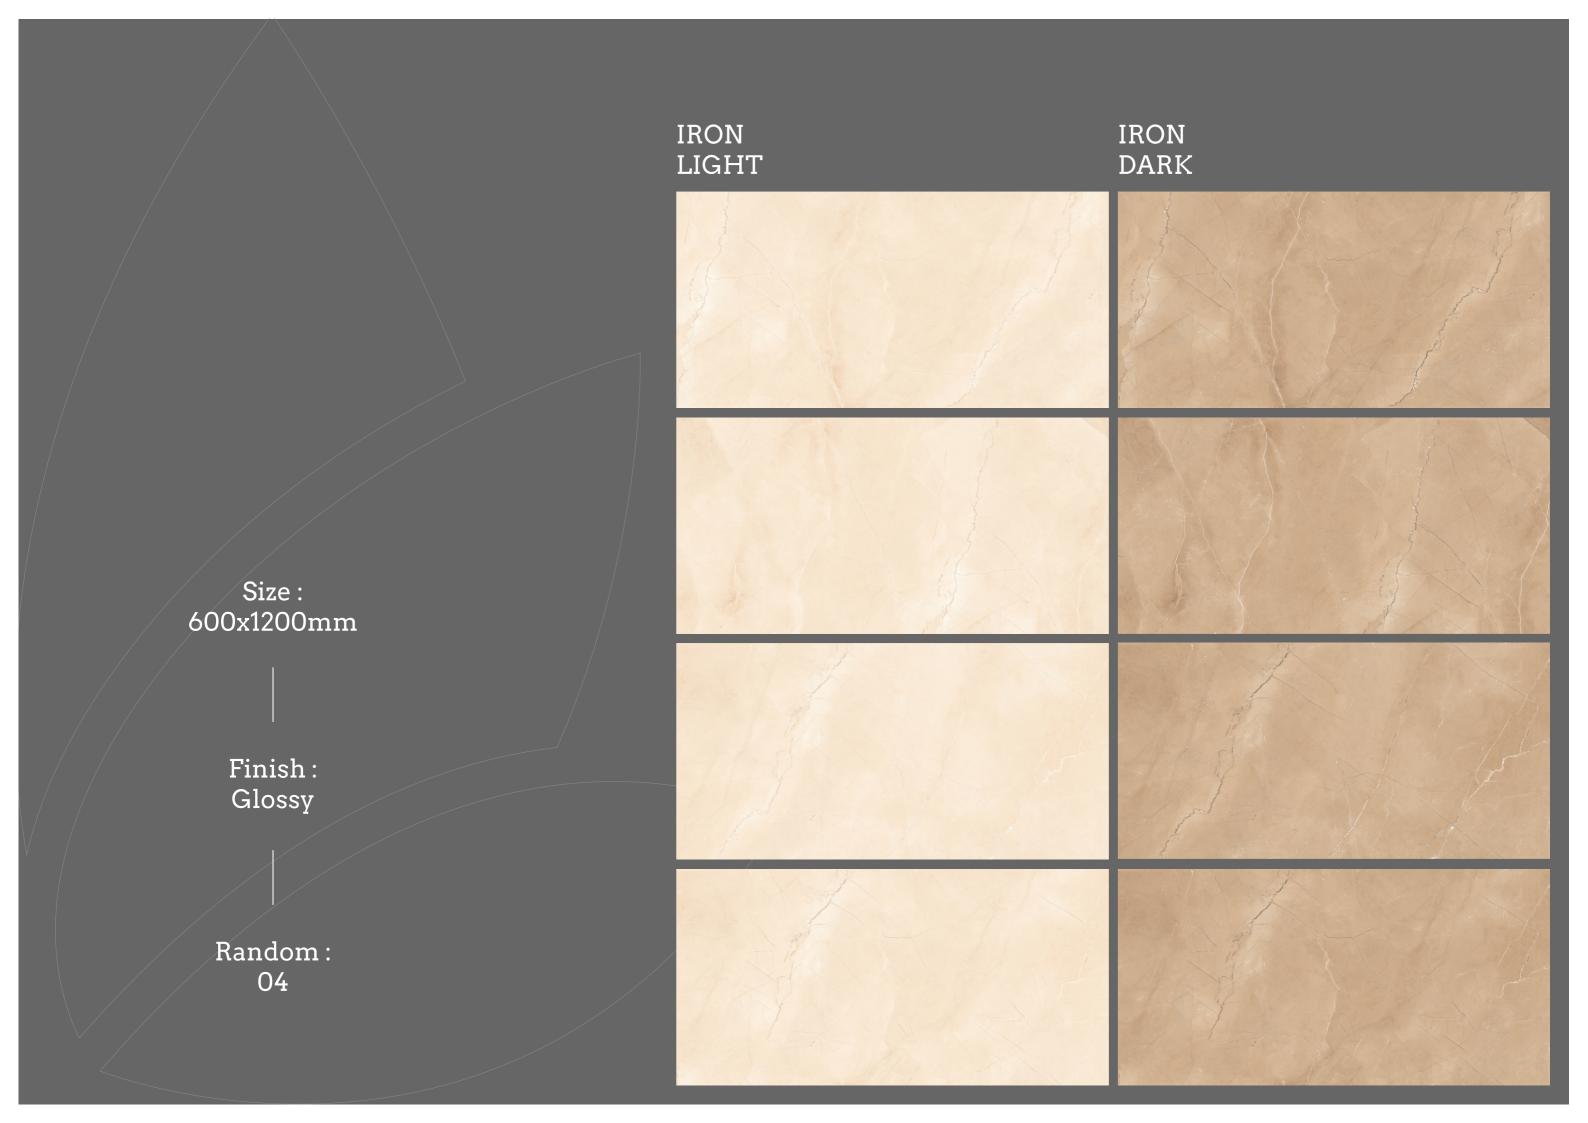





PIZARO LIGHT - DARK



Size : 600x1200mm

Finish: Glossy

Random: 04







SEANA LIGHT - DARK



SEANA LIGHT SEANA DARK Size: 600x1200mm Finish: Glossy Random: 04

TECHNICAL SPECIFICATION

PACKING DETAILS

SR. NO	PRODUCT	NOMINAL SIZE	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600x1200mm	2	1.44 Sq. Mtr.

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD			
REGULATORY PROPERTIES							
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2			
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2			
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2			
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2			
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2			
Color difference	Unaltered	No change	No change	ISO-10545-16			
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER			
STRUCTURAL PROPERTIES							
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3			
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082			
MASSIVE MECHANICAL PROPERTIES							
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4			
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4			
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5			
SURFACE MECHANICAL PROPERTIES							
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7			
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101			
THERMO HYGROMETRIC PROPERTIES							
Frost resistance	No damage	No damage	No damage	ISO-10545-12			
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9			
Moisture expansion	Nil	Nil	Nil	ISO-10545-10			
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8			
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11			
CHEMICAL PROPERTIES							
Chemical resistance	No damage	No damage	No damage	ISO-10545-13			
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14			
SAFETY PROPERTIES							
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17			
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.			
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15			